


Flat box

HW 035

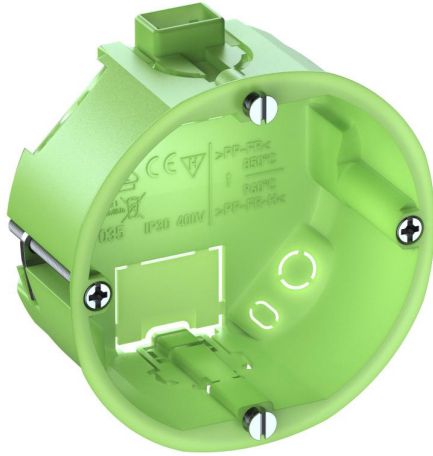

HW 035

Flat box

Productnumber: 92003501
Dimensions: 68 x 68 x 35 mm

Cavity wall flat box, flame resistant, special box with small installation depth (35 mm), for thin walls with plate thicknesses from 1 to 20 mm, with moulded patented combi jumpers, device screw spacing 60 mm

Drilled hole Ø 68 mm, 35 mm deep



Technical Data

electrical characteristics

Rated insulation voltage AC:	400 V
Type of protection:	IP30
UL Type Rating:	not specified

Dimensions

Width:	68 mm
Length:	68 mm
Height:	35 mm
Inner height:	33 mm

Material characteristics

Industry quality:	no
Halogen free:	no
Flammability class according with UL94:	HB
Glow-wire flammability according to EN 60695-2-11:	850 °C

Ambient conditions

max. relative humidity 25°C:	- %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C

Material

Base unit material:	Plastic
Cover material:	Polypropylene

Certificates

Test mark:	VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22))
------------	---

Accessories

[92513501 - HW LFR-35 - HW hole cutter](#)

[97910501 - ES-10 - Installation screw](#)

[97910601 - ES-18 - Installation screw](#)

[97910701 - ES-25 - Installation screw](#)